


DESCRIPTION

Adhesive corner bead for external corners. Ideal for protecting walls against wear, friction, and impacts. Ready for direct plaster application after installation, at temperatures above 10°C on clean, dry, and sound surfaces.

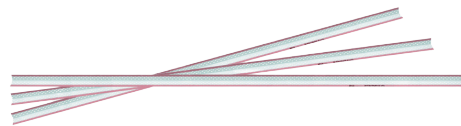

TECHNICAL SPECIFICATIONS

APPLICATION CONDITIONS:

- +10°C to +35°C
- Maximum humidity 70% RH

PH:

8 ± 1

CLEANING TOOLS:

With water

DRYING:

- Immediate plastering after bonding. No drying time required. Do not apply Alltek Exatek at temperatures below 10°C to avoid compromising the adhesive.
- No drying time required.

PACKAGING AND STORAGE

- Carton of 50 units.

METHOD OF APPLICATION

SUBSTRATES:

- Cardboard plasterboards.
- For outgoing angles +/- 90°.

PREPARATION OF SUBSTRATE:

- The supports, preparatory work, and conditions of application will be in accordance with the DTU and current standards.
- The plates must be secured and comply with DTU 25-41.

APPLICATION TIPS:

- Measure and cut Alltek Exatek to the desired length.
- Dust the corners intended to receive the molding.
- Apply the angle iron at temperatures above 10°C.
- Remove the protective film from the adhesive strips.
- Install Alltek EXATEK by applying slight pressure.

CHARACTERISTICS

- Dimensions: 2.50 / 2.70 and 3.00 m

HEALTH AND SAFETY

The safety data sheet is available on the website: <https://icp-alltek.com/en-gb/documentation/>

RECOMMENDATIONS:

- Ventilate the room during application and drying.
- Use clean and properly maintained PPE: gloves and eye protection designed against liquid splashes, mask during sanding operations.
- To clean tools, scrape off excess and immerse in a minimum amount of water.
- Do not dispose of residues in the sewer. Dispose of contents/container at a hazardous or special waste collection center.
- Store protected from frost and heat.
- Ensure adequate ventilation to remove excess humidity and speed up drying.